


PLGWI Gamma inox

The eyebolt is 360° rotatable, comes with an interchangeable special screw that is 100% crack-tested and marked with the load capacity and the thread size! An integrated sleeve protects the surface of the load. The batch number displayed on all load-bearing parts such as the eye and screws as well as the serial number make identification, traceability and performance of mandatory, regular inspections simpler than ever.

Additional benefits of the PLGW inox lifting point:

Extendable areas of application thanks to Duplex steel with heightened corrosion-resistance.

The PRE/N value that determines the alloy composition and thus also the level of corrosion-resistance lies at approx. 34.

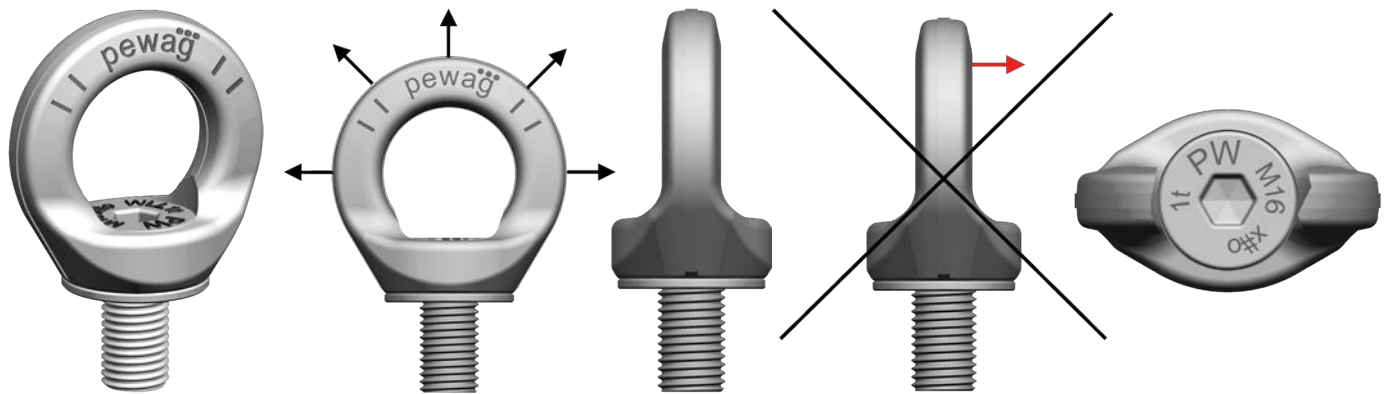

Artnr	Type	thread mm	Load capacity kg	Measurements mm								Weight kg	
				a	b	c	d	e	f	n	n max		
	PLGWI 0,5 t	M12	500	30	55	12	30	59	30	18	160	8	0,23
	PLGWI 1 t	M16	1,000	35	64	14	35	67	35	24	160	10	0,36
	PLGWI 2 t	M20	2,000	40	72	17	40	80	45	30	160	12	0,60

Artnr	Benämning	Fastening torque (Nm)	Dim	WLL kg									
				1 0°	1 90°	2 0°	2 90°	2 0-45°	2 45-60°	3+4 0-45°	3+4 45-60°	2 asymm.	3+4 asymm.
	PLGWI 0,5 t	25	M12	1,500	500	3,000	1,000	700	500	1,060	750	500	500
	PLGWI 1 t	50	M16	3,000	1,000	6,000	2,000	1,400	1,000	2,100	1,500	1,000	1,000
	PLGWI 2 t	115	M20	3,800	2,000	7,600	4,000	2,800	2,000	4,200	3,000	2,000	2,000

