

## PCWI Stainless steel pump chains



These high-grade pump chains have a load capacity that ranges from 200 to max. 12,000 kg. Their welded design, solid construction and range of components makes them particularly suitable for submersible pumps and breathers in water and wastewater applications. Systematic expediency These pump chains are tested for perfection and serialised with a dedicated identification tag and test certificate, issued individually for each chain. Enlarged master links at the beginning, at segmented intervals and at the end of the chain make them ideally suited for step-by-step lowering, lifting or locking.

Upon request, we also offer customised variations:


- Two-legged system with “Y” for pumps equipped with 2 eye screws
- Alternative end fittings, such as eye hooks, BWI links or shackles
- Additional stabilisation chain
- Variation of standard segment length
- Customised models available
- Stainless steel hoist chains for pump stations are available upon request

We recommend safety shackles type SSWI (see p. 28) for joining the pump to the chain.

**BEDSAB**  
B. EDSTRÖM AB

Bedsab B.Edstöm AB, Lifting & Lashing equipment  
Stallarholmsvägen 32 • S-124 59 Bandhagen • Sweden  
Telephone +46 (0)8 714 54 30 • Telefax +46 (0)8 714 77 22  
E-mail: [bedsab@bedsab.se](mailto:bedsab@bedsab.se) • [www.bedsab.se](http://www.bedsab.se)

# DATA SHEET

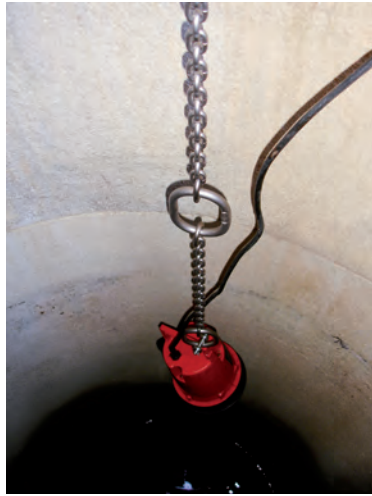

Typ	WLL kg	Master-link	Dimensions masterlink mm	Transition link	Dimensions BWI mm	Chain type	SL* Number of links	Segment length SL* mm	Length of master links/end links mm	Weight SL* kg
PCWI 4/200	200	AWI 6	6x60x35			WOX 4x12	77	984	60	0,39
PCWI 4/400	400	AWI 8	8x60x35	BWI 5	5x26x13	WOX 4x12	73	988	60	0,43
PCWI 4/560	560	AWI 8	8x60x35	BWI 7	7x36x16	WOX 5x15	53	943	60	0,62
PCWI 4/630	630	AWI 10	10x80x50	BWI 7	7x36x16	WOX 5x15	53	963	80	0,68
PCWI 6	850	AWI 10	10x80x50	BWI 7	7x36x16	WOX 6x18	47	998	80	0,90
PCWI 7	1250	AWI 13	13x110x60	BWI 9	9x44x20	WOX 7x21	37	975	110	1,35
PCWI 8	1600	AWI 13	13x110x60	BWI 10	10x44x20	WOX 8x24	33	990	110	1,70
PCWI 10	2500	AWI 16	16x110x60	BWI 13	13x54x25	WOX 10x30	25	968	110	2,6
PCWI 13	3500	AWI 18	18x135x75	BWI 16	17x70x34	WOX 13x39	19	1016	160	4,50
PCWI 16	6300	AWI 22	23x160x90	BWI 20	20x85x40	WOX 16x48	15	1050	135	8,00
PCWI 20**	8000	AWI 26	27x180x100	BWI 22	23x115x50	WOX 20x60	27	2030	180	21
PCWI 26**	12000	AWI 45	45x340x180	BWI 32	32x150x70	WOX 26x78	19	2122	340	43,20

\* SL consisting of 1 x AWI, 2 x BWI, WOX chain in standard length. PCWI 4/200 manufactured without transition links BWI

\*\*made to order

**BEDSAB**  
B.EDSTRÖM AB

Bedsab B.Edstöm AB, Lifting & Lashing equipment  
Stallarholmsvägen 32 • S-124 59 Bandhagen • Sweden  
Telephone +46 (0)8 714 54 30 • Telefax +46 (0)8 714 77 22  
E-mail: [bedsab@bedsab.se](mailto:bedsab@bedsab.se) • [www.bedsab.se](http://www.bedsab.se)